

(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 729 329 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
10.03.1999 Bulletin 1999/10

(51) Int. Cl.⁶: **A61F 13/15**
// **A61F13/56**

(21) Application number: **95901653.6**

(86) International application number:
PCT/SE94/01066

(22) Date of filing: **14.11.1994**

(87) International publication number:
WO 95/13772 (26.05.1995 Gazette 1995/22)

(54) **DISPOSABLE DIAPER HAVING ELASTICIZED LEG CUFFS**

WEGWERFWINDEL MIT ELASTISCHEN BEINMANSCHETTE

COUCHE JETABLE COMPORTANT DES BORDS FRONCES ELASTIQUES POUR LES CUISSES

(84) Designated Contracting States:
AT BE CH DE DK ES FR GR IE IT LI NL PT SE

• **KLING, Robert**
S-511 63 Skene (SE)

(30) Priority: **15.11.1993 SE 9303748**

(74) Representative:
Hammond, Andrew David
Albihns Patentbyrå Göteborg AB
P.O.Box 142
401 22 Göteborg (SE)

(43) Date of publication of application:
04.09.1996 Bulletin 1996/36

(73) Proprietor:
SCA Hygiene Products AB
405 03 Göteborg (SE)

(56) References cited:
GB-A- 2 063 677 **GB-A- 2 112 270**
SE-B- 446 939 **US-A- 4 050 462**

(72) Inventors:
• **RÖNNBERG, Peter**
S-431 33 Mölndal (SE)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 729 329 B1

Description**TECHNICAL FIELD:**

[0001] The present invention relates to a disposable diaper according to the preamble of claim 1.

BACKGROUND OF THE INVENTION:

[0002] For reasons of comfort and fit, it is nowadays common to provide diapers in different sizes. For example, infants' diapers are available in a certain range of sizes including newborn, toddler, etc. For adults suffering from incontinence, due to the large disparity in the size of adults as well as the various absorption requirements placed on the diapers, a wide range of different sized diapers is required. In terms of cost-effectiveness, it is optimal to have a single size which conforms to most adults.

[0003] In order to reduce the risk of leakage, it is known to provide diapers with elasticized leg cuffs. Typical of such diapers are those disclosed in US-A-4 437 860, US-A-4 486 192, GB-B-2 143 115, US-A-4050462, SE-B-446939 and GB-A-2063677. In these known diapers, the elastic ribbon in the elasticized leg cuffs extends along each longitudinal edge portion of the diaper in the vicinity of the crotch portion of the diaper. At either end of the crotch portion, wider waist portions are provided within which the elastic ribbon terminates at a distance from the longitudinal edge portion of the diaper. Fastening means such as hook-and-loop fasteners are provided at the longitudinal edge portions of the waist portions for fastening the diaper around the wearer.

SUMMARY OF THE INVENTION:

[0004] It is an object of the present invention to provide a disposable diaper which may be comfortably worn by persons of differing size.

[0005] This object is achieved in accordance with the present invention by a disposable diaper according to claim 1.

[0006] Preferred embodiments of the present invention are detailed in the dependent claims.

BRIEF DESCRIPTION OF THE DRAWINGS:

[0007] The invention will be described in greater detail in the following by way of example only and with reference to the attached drawings, in which:

Fig. 1 is a plan view of an absorbent article in accordance with the present invention having elasticized leg cuffs, the article being illustrated during a stage of the manufacturing process, and

Fig. 2 is a partial sectional perspective view taken substantially along the line II-II of Fig. 1, though with the article in a finished condition.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS:

[0008] In the drawing, an absorbent article in the form of a disposable diaper is generally denoted by reference numeral 10. For reasons of clarity, the diaper 10 is shown in Fig. 1 in a stage occupied by the diaper during its manufacture. Accordingly, reference numeral 12 denotes joining lines, for example glue lines or heat bonding lines, about which the diaper is gathered in a manner known per se to form a pair of inner cuffs 14 (Fig. 2) through which an elastic chord 16 runs. Due to the gathering of the diaper about the joining lines 12, the diaper adopts a generally hour glass shape with a narrow centrally disposed crotch portion 18 and wider front and rear waist portions 20, 22 respectively at transverse end regions of the crotch portion.

[0009] The diaper 10 is provided with prestretched elastic means 24 disposed along longitudinal edge portions 25 of the diaper. Advantageously, the waist portions 20, 22 may be provided with transversely extending elastic means 26, 28 respectively.

[0010] To permit the diaper to be fastened around a wearer, fastening means are provided at the waist portions. As illustrated in Fig. 1, the front waist portion 20 which would normally be disposed at the front of the wearer may be provided with a pair of fastening means such as hook members 30, with each hook member 30 extending substantially perpendicularly from the longitudinal edge portion 25 of the diaper. The fastening means may further comprise a belt 32 extending substantially perpendicularly from the rear waist portion 22 which portion, during use, is normally disposed at the back of the wearer. As illustrated in Fig. 1, the belt may be in two halves, with each half extending from the opposed longitudinal edge portions 25 of the diaper. The two belt halves are intended to pass around the waist of the wearer and are fastened together at the front of the wearer by any suitable means such as a hook and loop fastener. Preferably, the belt is made from a nonwoven material which acts as a loop fastener for the hook members 30.

[0011] The structure of the diaper of Fig. 1 will be more easily understood from the partial sectional view through the crotch portion 18, as illustrated in Fig. 2. In keeping with the present invention, the diaper 10 has a generally hour glass shape and includes a facing sheet 34, a backing sheet 36 and an absorbent core 38 sandwiched between the facing and backing sheets 34, 36 respectively. The specific components used to form the illustrated diaper may be any of the types commonly used for such purposes. For example, the facing sheet 34 may be any soft flexible liquid permeable material such as a nonwoven fibrous web having a basis weight

of around 20 g/m². The backing sheet 36 is made from a liquid impermeable material such as a thin (for example 20 μ) plastic film of polyethylene, polypropylene, polyvinylchloride or the like. The absorbent core 38 may comprise wood pulp fibres, air-laid tissue, various superabsorbent materials, etc.

[0012] As mentioned above with reference to Fig. 1, prestretched elastic means 24 are disposed along the longitudinal edge portions 25 of the diaper. As clearly shown in Fig. 2, the elastic means 24 may be in the form of an elongate elastic ribbon. The elastic ribbon is preferably relatively wide, for example between 1 and 2 cm, preferably about 1.5 cm, so as to reduce the tendency for the leg cuff to mark the wearer. The elastic ribbon may be incorporated in the diaper in any known manner, though preferably in the manner disclosed in our copending Swedish patent application with the title "Disposable diaper having elasticized leg cuffs".

[0013] In accordance with the present invention, the elastic means 24 extend along substantially the entire length of the longitudinal edge portions 25 between the fastening means on the front and rear waist portions 20, 22 respectively. This implies that when the diaper is being fastened to the wearer, a tensioning force exerted during the fastening operation on the fastening means 30 on the front waist portion 20 will directly cause the elastic means 24 to expand, thereby ensuring a tighter fit of the leg cuffs about the wearer.

[0014] To further enhance the comfort of the wearer of the diaper, it is advantageous if the fastening means 32 on the rear waist portion 22 present a relatively large engagement surface for receiving the fastening means on the front waist portion 20. Thus, the fastening means 30 on the front waist portion 20 preferably project substantially perpendicularly from the longitudinal edge portions 25 of the diaper, with the fastening means having a predetermined width a. Similarly, the fastening means 32 on the rear waist portion 22 project substantially perpendicularly from the longitudinal edge portions 25 of the diaper, with these fastening means having a predetermined width b. The percentage ratio of the width a of the fastening means 30 on the front waist portion 20 to the width b of the fastening means 32 on the rear waist portion 22 preferably lies between about 10% and about 30%, most preferably about 25%.

[0015] When the fastening means 30 on the front waist portion 20 comprise a pair of opposed hook members, their width a may be between about 15 mm and about 45 mm, preferably about 30 mm.

[0016] When the fastening means 32 on the rear waist portion 22 are a pair of opposed loop fasteners, the width b may be between about 50 mm and about 150 mm, preferably about 120 mm. Advantageously, the opposed loop fasteners are in the form of a nonwoven belt, though they may comprise regions of hook-engaging material affixed to or incorporated in the rear waist portion 22.

[0017] Thus, when the diaper is being fastened

around a wearer, tension is applied to the fastening means 30 on the front waist portion 20 until the leg elastic 24 is sufficiently stretched. The fastening means 30 can then be affixed to the fastening means 32 on the rear waist portion. The tension can be readily adjusted by moving the fastening means 30 over the width of the fastening means 32 on the rear waist portion.

[0018] It is to be understood that the term "diaper" is intended to encompass absorbent articles of the type disclosed in the appended claims which are worn by infants and adults alike. The terms "front" waist portion and "rear" waist portion denote the positioning of these portions during normal intended use of the diaper, though it is conceivable that these portions be reversed, e.g. that hook members be provided on the "rear" waist portion and loop fasteners on the "front" waist portion. It will be apparent to the skilled person that suitable fastening means other than hook and loop fasteners, e.g. releasable adhesives, may be employed

Claims

1. A disposable diaper (10) comprising an absorbent core (38) disposed between a facing sheet (34) and backing sheet (36), said diaper having a generally hour glass shape with a narrow centrally disposed crotch portion (18), a front waist portion (20) at one transverse end region of said crotch portion and a rear waist portion (22) at the other transverse end region of said crotch portion, said waist portions being wider than said crotch portion and said waist portions being provided with fastening means (30; 32) for fastening the diaper around a wearer, said diaper further comprising prestretched elastic means (24) disposed along longitudinal edge portions (25) of said diaper for providing predetermined gathered and substantially non-gathered regions along said edge portions, **characterized in that** said elastic means (24) extend along substantially the entire length of said longitudinal edge portions (25) from said fastening means (30) on said front waist portion to said fastening means (32) on said rear waist portion (22), and in that said fastening means comprise a belt extending substantially perpendicularly from the rear waist portion (32), said belt being adapted to pass around the waist of the wearer.
2. The disposable diaper according to claim 1, **characterized in that** said elastic means is an elastic ribbon.
3. The disposable diaper according to claim 1, **characterized in that** said fastening means (30) on said front waist portion (20) project substantially perpendicularly from said longitudinal edge portions (25) of said diaper, said fastening means having a predetermined width (a).

4. The disposable diaper according to claim 1, **characterized in that** said fastening means (32) on said rear waist portion (22) project substantially perpendicularly from said longitudinal edge portions (25) of said diaper, said fastening means having a pre-determined width (b).

5. The disposable diaper according to claim 3 and 4, **characterized in that** the percentage ratio of the width (a) of the fastening means (30) on said front waist portion (20) to the width (b) of the fastening means (32) on said rear waist portion (22) lies between about 10% and about 30%, preferably about 25%.

6. The disposable diaper according to claim 5, **characterized in that** said fastening means (30) on said front waist portion (20) are a pair of opposed hook members, the width (a) of which lies between about 15 mm and about 45 mm, preferably about 30 mm.

7. The disposable diaper according to claim 5, **characterized in that** said fastening means (32) on said rear waist portion (22) are a pair of opposed loop fasteners, the width (b) of which lies between about 50 mm and about 150 mm, preferably about 120 mm.

8. The disposable diaper according to claim 7, **characterized in that** said opposed loop fasteners are in the form of a nonwoven belt.

Patentansprüche

1. Wegwerfwindel (10) mit einem absorbierenden Kern (38), der zwischen einer Decklage (34) und einer Rücklage (36) angeordnet ist, wobei die Windel eine im wesentlichen Sanduhrform mit einem schmalen, mittig angeordneten Schrittteil (18), einem Tailenvorderteil (20) an einem Querendbereich des Schrittteils und einem Tailenrückteil (22) an dem anderen Querendbereich des Schrittteils besitzt, wobei die Taillenteile breiter sind als der Schrittteil und die Taillenteile mit Befestigungsmitteln (30; 32) zum Befestigen der um die Trägerperson herum angelegten Windel versehen sind, wobei die Windel ferner vorgereckte elastische Mittel (24) umfaßt, die entlang Längsrandbereichen (25) der Windel angeordnet sind, um entlang den Rändern vorbestimmt geraffte und nicht geraffte Bereiche zu schaffen, **dadurch gekennzeichnet, daß** sich die elastischen Mittel (24) im wesentlichen entlang der gesamten Länge der Längsrandbereiche (25) von den Befestigungsmitteln (30) an dem Tailenvorderteil zu den Befestigungsmitteln (32) an dem Tailenrückteil (22) erstrecken, und daß die Befestigungsmittel einen Gürtel umfassen, der sich im wesentlichen senkrecht von dem Tailenrückteil

(32) erstreckt, wobei der Gürtel angepaßt ist, daß er um die Taille der Trägerperson herumreicht.

2. Wegwerfwindel nach Anspruch 1, **dadurch gekennzeichnet, daß** das elastische Mittel (24) ein Gummiband ist.

3. Wegwerfwindel nach Anspruch 1, **dadurch gekennzeichnet, daß** die Befestigungsmittel (30) an dem Tailenvorderteil (20) im wesentlichen senkrecht von den Längsrandbereichen (25) der Windel vorstehen, wobei diese Befestigungsmittel eine vorbestimmte Breite (a) haben.

4. Wegwerfwindel nach Anspruch 1, **dadurch gekennzeichnet, daß** die Befestigungsmittel (32) an dem Tailenrückteil (22) im wesentlichen senkrecht von den Längsrandbereichen (25) der Windel vorstehen, wobei diese Befestigungsmittel eine vorbestimmte Breite (b) haben.

5. Wegwerfwindel nach Anspruch 3 oder 4, **dadurch gekennzeichnet, daß** das Prozentverhältnis der Breite (a) der Befestigungsmittel (30) an dem Tailenvorderteil (20) zu der Breite (b) der Befestigungsmittel (32) an dem Tailenrückteil (22) zwischen 10% und ungefähr 30% liegt, vorzugsweise ungefähr 25% beträgt.

6. Wegwerfwindel nach Anspruch 5, **dadurch gekennzeichnet, daß** die Befestigungsmittel (30) an dem Tailenvorderteil (20) ein Paar einander gegenüberliegender Hakenglieder sind, deren Breite (a) zwischen 15 mm und ungefähr 45 mm liegt, vorzugsweise ungefähr 30 mm beträgt.

7. Wegwerfwindel nach Anspruch 5, **dadurch gekennzeichnet, daß** die Befestigungsmittel (32) an dem Tailenrückteil (22) ein Paar einander gegenüberliegender Schlingenbefestigungen sind, deren Breite (b) zwischen 50 mm und ungefähr 150 mm liegt, vorzugsweise ungefähr 120 mm beträgt.

8. Wegwerfwindel nach Anspruch 7, **dadurch gekennzeichnet, daß** die einander gegenüberliegenden Schlingenbefestigungen in Gestalt eines Vliesgürtels vorliegen.

Revendications

1. Couche-culotte jetable (10) comprenant un noyau absorbant (38) disposé entre une feuille avant (34) et une feuille arrière (36) ladite couche-culotte ayant la forme générale d'un sablier avec une partie d'entre-jambes étroite (18) disposée centralement, une partie de taille avant (20) au niveau d'une des régions d'extrémité transversale de ladite partie d'entre-jambes et une partie de taille arrière (22) au

niveau de l'autre région d'extrémité transversale de ladite partie d'entre-jambes, lesdites parties de taille étant plus large que ladite partie d'entre-jambes et lesdites parties de taille étant pourvues de moyens de fixation (30; 32) servant à fixer la couche-culotte autour d'un utilisateur, ladite couche-culotte comprenant en outre des moyens élastiques pré-tendus (24) disposés le long de parties marginales longitudinales (25) de ladite couche-culotte pour former des régions prédéterminées froncées et sensiblement non-froncées le long desdites parties marginales, caractérisée en ce que lesdits moyens élastiques (24) s'étendent le long de pratiquement toute la longueur desdites parties marginales longitudinales (25) depuis lesdits moyens de fixation (30) sur ladite partie de taille avant jusqu'auxdits moyens de fixation (32) sur ladite partie de taille avant jusqu'auxdits moyens de fixation (32) sur ladite partie de taille arrière (22), et en ce que lesdits moyens de fixation comprennent une ceinture s'étendant de façon sensiblement perpendiculaire depuis la partie de taille avant (32), ladite ceinture étant adaptée pour passer autour de la taille de l'utilisateur.

2. Couche-culotte jetable selon la revendication 1, caractérisée en ce que lesdits moyens élastiques sont des rubans élastiques.

3. Couche-culotte jetable selon la revendication 1, caractérisée en ce que lesdits moyens de fixation (30) sur ladite partie de taille avant (20) font saillie de façon sensiblement perpendiculaire depuis lesdites parties marginales longitudinales (25) de ladite couche-culotte, lesdits moyens de fixation ayant une largeur prédéterminée (a).

4. Couche-culotte jetable selon la revendication 1, caractérisée en ce que lesdits moyens de fixation (32) sur ladite partie de taille arrière (22) font saillie de façon sensiblement perpendiculaire depuis lesdites parties marginales longitudinales (25) de ladite couche-culotte, lesdits moyens de fixation ayant une largeur prédéterminée (b).

5. Couche-culotte jetable selon les revendications 3 et 4, caractérisée en ce que le rapport exprimé en pourcentage de la largeur (a) des moyens de fixation (30) sur ladite partie de taille avant (20) à la largeur (b) des moyens de fixation (32) sur ladite partie de taille arrière (22) se situe entre environ 10% et environ 30%, étant de préférence d'environ 25%.

6. Couche-culotte jetable selon la revendication 5, caractérisée en ce que lesdits moyens de fixation (30) sur ladite partie de taille avant (20) sont constitués par une paire d'éléments opposés formant

crochets, dont la largeur (a) se situe entre environ 15 mm et environ 45 mm, étant de préférence d'environ 30 mm.

7. Couche-culotte jetable selon la revendication 5, caractérisée en ce que lesdits moyens de fixation (32) sur ladite partie de taille arrière (22) sont constitués par une paire d'éléments de fixation opposés formant boucles, dont la largeur (b) se situe entre environ 50 mm et environ 150 mm, étant de préférence d'environ 120 mm.

8. Couche-culotte jetable selon la revendication 7, caractérisée en ce que lesdits éléments de fixation opposés formant bouches se présentent sous la forme d'une ceinture en non tissé.

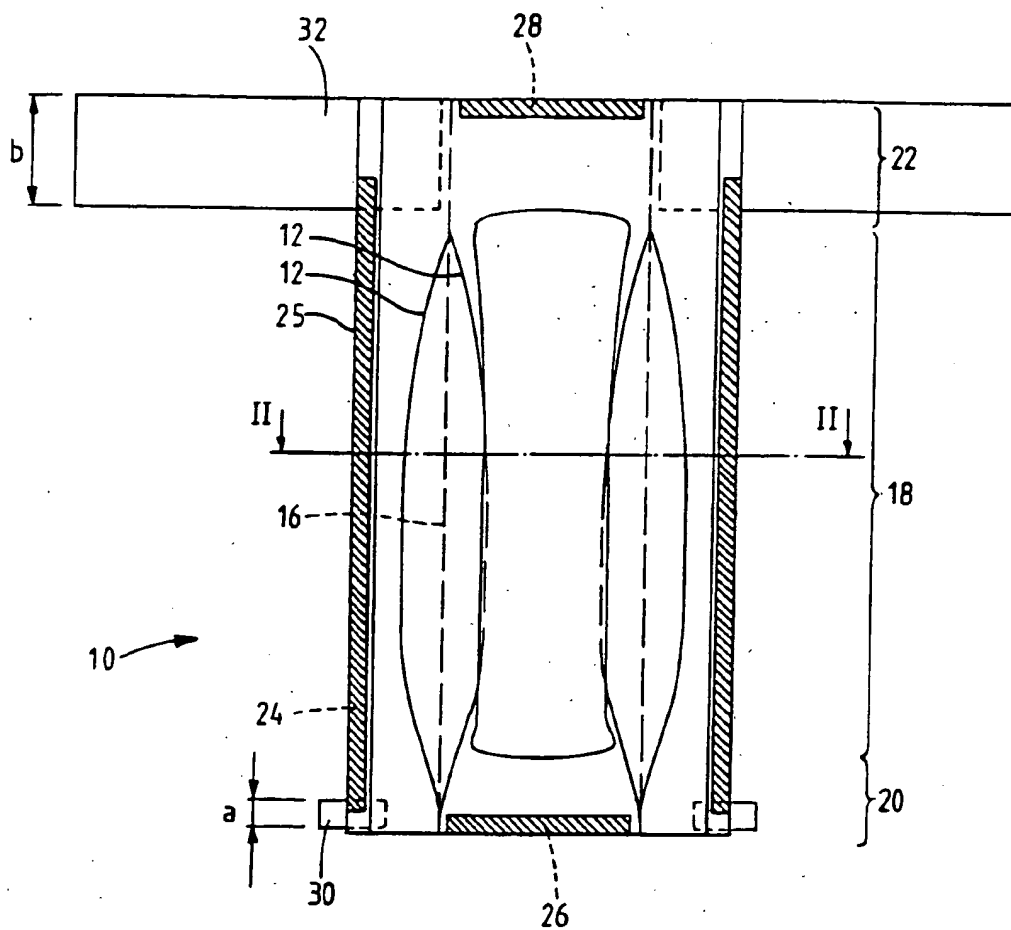


Fig.1

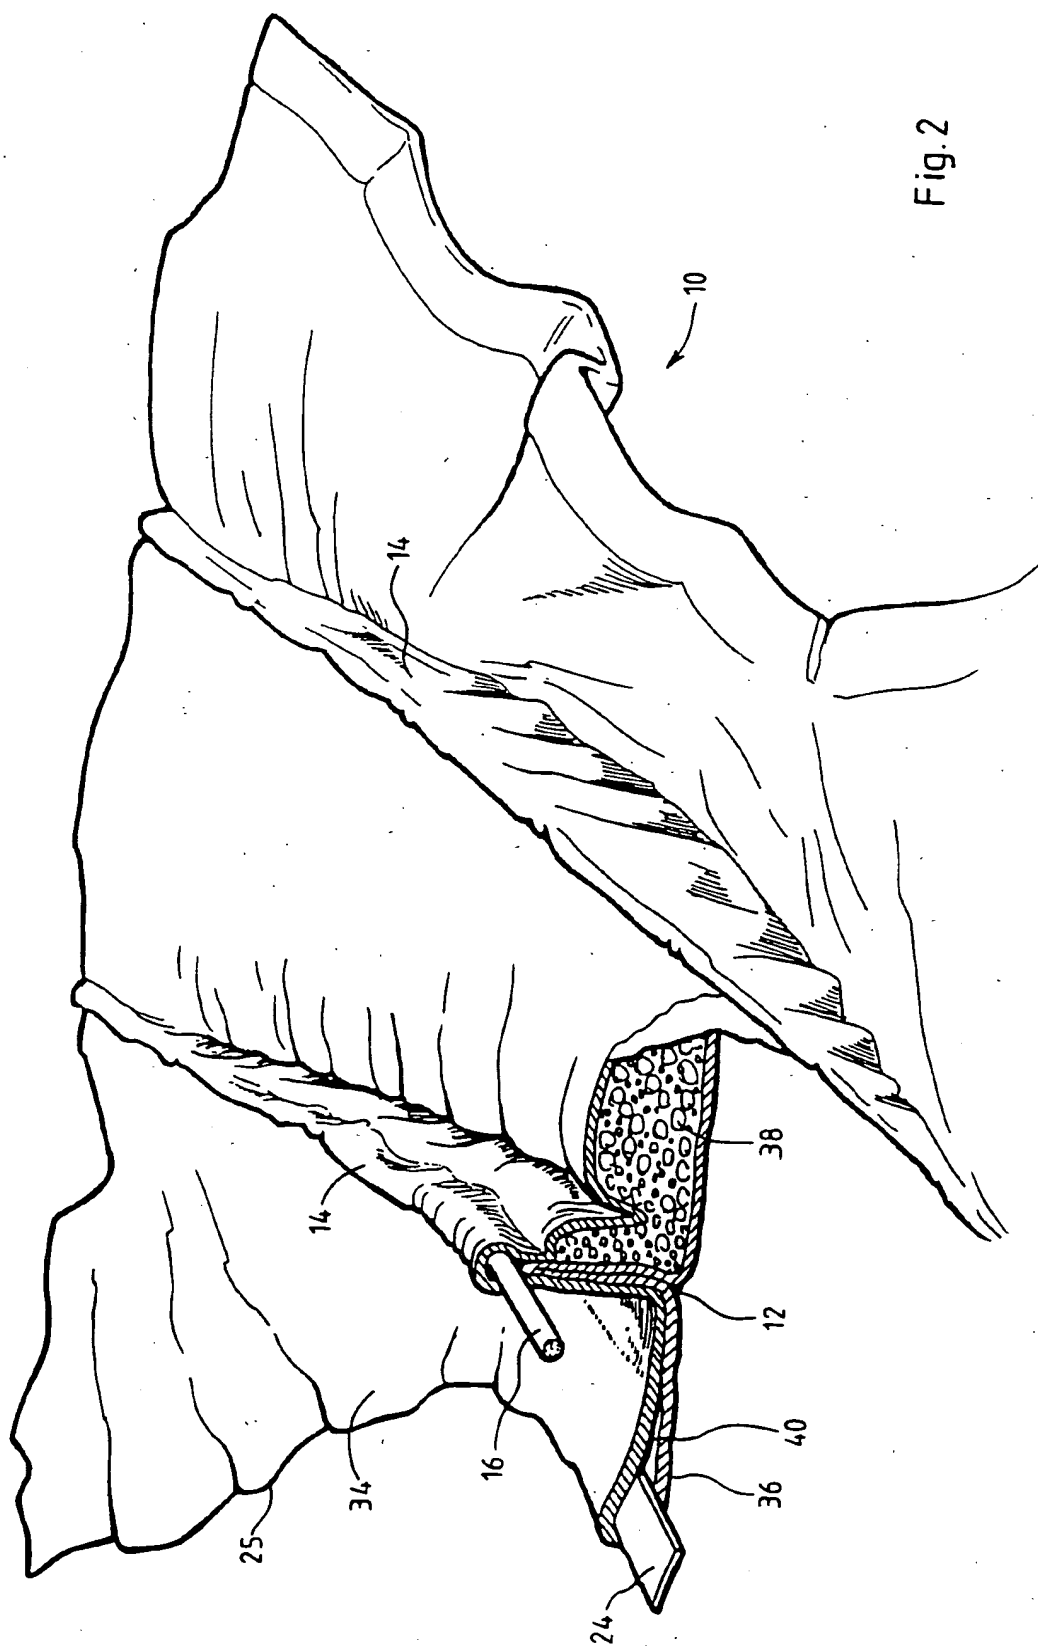


Fig. 2